


## PX-SP Series

### Self priming magnetic drive pump

- Up to 5 ft of lift for priming.
- Can replace drum pumps for some applications.
- Polypropylene and ceramic wetted parts for reliable performance.



### Pump performance curve

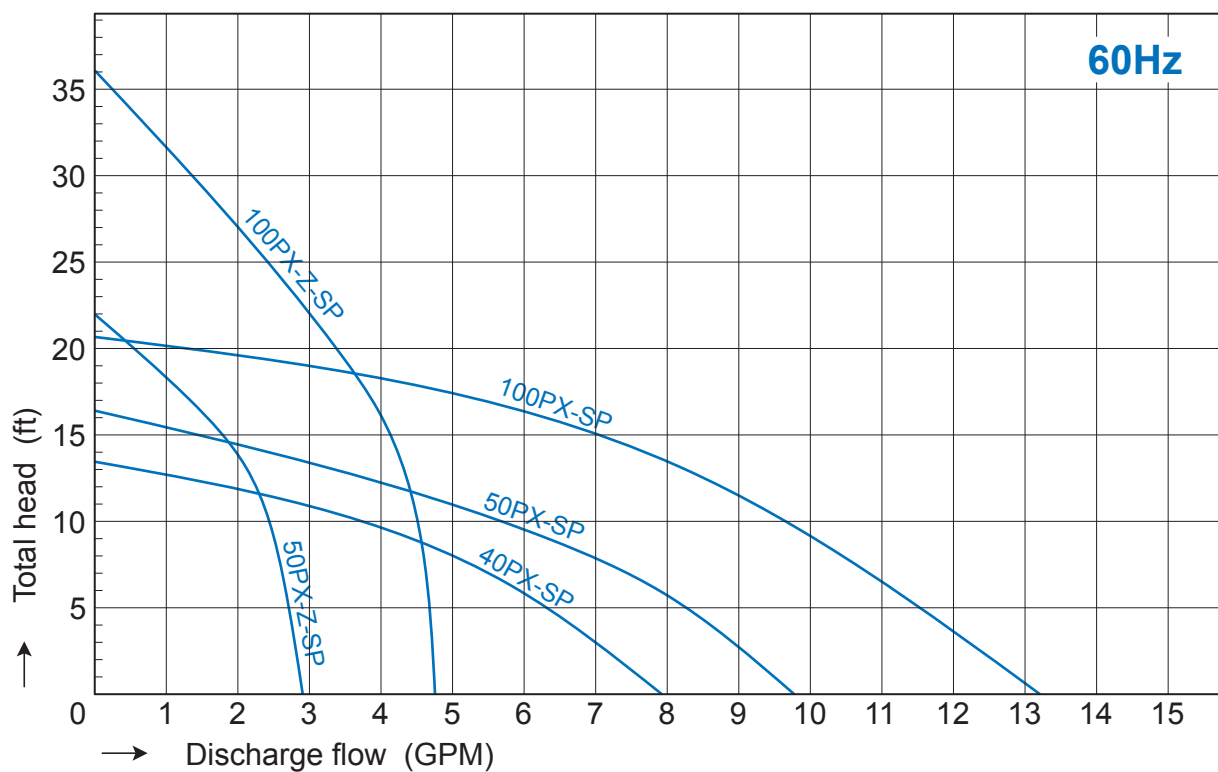

### Specification table

Nominal speed 2,500/3,000 r.p.m

Model	Fitting size (")		Performance ft-GPM, 60Hz		Max suction lift head (ft)	Motor Output x Input(W)	Net weight (lb)
	Hose	NPT thread	Max total head-max discharge	Specified head-specified discharge			
	InxOutlet	InxOutlet					
NH-40PX-SP	11/16 x 11/16	3/4 x 3/4	13.5-8.0	6.5-5.8	3.9	20 - 45	4.4
NH-50PX-Z-SP	11/16 x 11/16	3/4 x 3/4	22.0-3.0	13.0-2.0	3.9	20 - 55	4.8
NH-50PX-SP	13/16 x 13/16	3/4 x 3/4	16.5-9.8	8.0-6.3	3.9	45 - 90	6.6
NH-100PX-Z-SP	11/16 x 11/16	3/4 x 3/4	36.0-4.8	20.0-3.5	3.9	45 - 95	6.6
NH-100PX-SP	13/16 x 13/16	3/4 x 3/4	20.7-13.2	13.0-8.2	3.9	65 - 120	7.7