


Configuration

Wall mounted metering pump with microprocessor technology, analog controls, stroke frequency adjustment.



MODELS	
CO	"VCO" Constant pump with stroke speed adjustment.
GL	"VCL" Constant pump with level control, stroke speed (frequency) adjustment.

CAPACITIES			HOSE
2001	1 l/h against 20 bar	0.26 GPH against 290 PSI	1/4" PVDF
1802	2 l/h against 18 bar	0.52 GPH against 261 PSI	1/4" PVDF
1804	4 l/h against 18 bar	1.05 GPH against 261 PSI	3/8" PVDF
1502	2 l/h against 15 bar	0.52 GPH against 217 PSI	1/4"
1504	4 l/h against 15 bar	1.05 GPH against 217 PSI	3/8" PVDF
1505	5 l/h against 15 bar	1.32 GPH against 217 PSI	3/8" PVDF
1004	4 l/h against 10 bar	1.05 GPH against 145 PSI	3/8" PVDF
1005	5 l/h against 10 bar	1.32 GPH against 145 PSI	3/8" PVDF
1010	10 l/h against 10 bar	2.64 GPH against 145 PSI	3/8" PVDF
0706	6 l/h against 7 bar	1.58 GPH against 101 PSI	3/8"
0510	10 l/h against 5 bar	2.64 GPH against 72 PSI	3/8"
0512	12 l/h against 5 bar	3.17 GPH against 72 PSI	3/8"
0408	8 l/h against 4 bar	2.11 GPH against 58 PSI	3/8"
0310	10 l/h against 3 bar	2.64 GPH against 43 PSI	3/8"
0217	17 l/h against 2 bar	4.49 GPH against 29 PSI	3/8"
0116	16 l/h against 1 bar	4.22 GPH against 14 PSI	3/8"

Power supply: 230 VAC (190÷265 VAC)
 Power supply: 115 VAC (90÷135 VAC)
 Power supply: 24 VAC (20÷32 VAC)
 Power supply: 12 VDC (10÷16 VDC)


Model V **CO** **2001** **4** **00** **00**

POWER SUPPLY	
00	230 VAC Schuko plug
0S	230 VAC Australian plug
01	230 VAC Without plug
03	115 VAC US plug
04	24 VAC Without plug
05	12 VDC *
07	24 VDC
* Not available on some models.	

LIQUID ENDS								
	Head	Orings	Valve		Diaphragm	Hose		Viscosity Max CPS
			Body	Balls		Delivery	Suction	
1	PVDF	Viton®	PVDF	Ceramic	PTFE	PVDF	PVDF	100
2	PVDF	EPDM	PVDF	Ceramic	PTFE	PVDF	PVDF	100
4 *	PVDF	Viton®	PVDF	Ceramic	PTFE	PVDF	PVDF	100
5 *	PVDF	EPDM	PVDF	Ceramic	PTFE	PVDF	PVDF	100

*Viton® is a registered trademark of DuPont Dow Elastomers.
 * Using this model for flows up to 1 l/h.*

INFORMATION				
	Stroke Speed		Power consumption at (230VAC)	Weight
	Min stroke per minute	Max stroke per minute		
2001	1	180	16 Watt	2.2 Kg (4.85 Lbs)
1802	1	180	16 Watt	
1804	1	180	22 Watt	
1502	1	180	16 Watt	
1504	1	180	16 Watt	
1505	1	180	22 Watt	
1004	1	180	16 Watt	
1005	1	180	16 Watt	
1010	1	180	22 Watt	
0706	1	180	16 Watt	
0510	1	180	16 Watt	
0512	1	180	22 Watt	
0408	1	180	16 Watt	
0310	1	180	16 Watt	
0217	1	180	16 Watt	
0116	1	180	16 Watt	

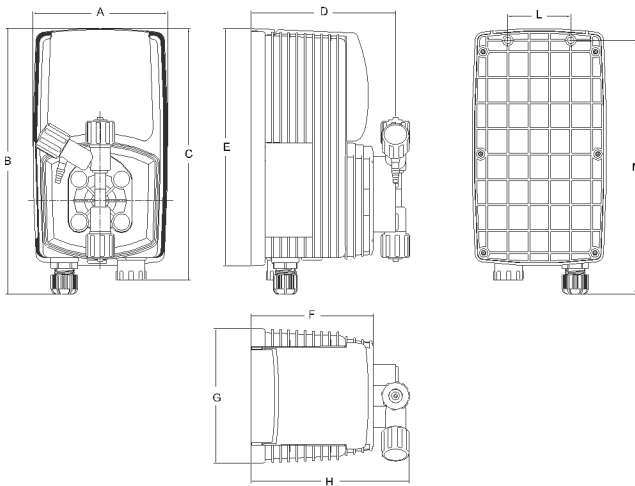

DIMENSIONS		
	mm	inches
A	106.96	4.21
B	210.44	8.28
C	199.44	7.85
D	114.50	4.50
E	187.96	7.40
F	97.00	3.81
G	106.96	4.21
H	125.47	4.93
L	50.00	1.96
M	201.00	7.91

Protezione IP65 (NEMA4x)
 "V" series metering pumps are manufactured in molded glass filled and PPO (Noryl® - modified PPO resin) housing to ensure protection against aggressive chemicals and tough environment .

Noryl® - modified PPO resin - is a registered trademark of General Electric Company.

MORE INFORMATION							
	Flow				cc per Stroke	Maximum Injection Pressure	
	Min cc/h	Max l/h	Min GPH	Max GPH			
2001	5.5	1	0.001	0.26	0.1	20 bar	290 PSI
1802	11.1	2	0.002	0.52	0.19	18 bar	261 PSI
1804	22.2	4	0.005	1.05	0.37	18 bar	261 PSI
1502	11.1	2	0.002	0.52	0.19	15 bar	218 PSI
1504	22.2	4	0.005	1.05	0.37	15 bar	218 PSI
1505	27.7	5	0.007	1.32	0.46	15 bar	218 PSI
1004	22.2	4	0.005	1.05	0.37	10 bar	145 PSI
1005	27.7	5	0.007	1.32	0.46	10 bar	145 PSI
1010	55.5	10	0.014	2.64	0.93	10 bar	145 PSI
0706	33.3	6	0.008	1.58	0.56	7 bar	102 PSI
0510	55.5	10	0.014	2.64	0.93	5 bar	72 PSI
0512	66.6	12	0.017	3.17	1.11	5 bar	72 PSI
0408	44.4	8	0.011	2.11	0.74	4 bar	58 PSI
0310	55.5	10	0.014	2.64	0.93	3 bar	43 PSI
0217	94.4	17	0.024	4.49	1.57	2 bar	29 PSI
0116	88.8	16	0.023	4.22	1.48	1 bar	14 PSI