




Add-on module of the WANGEN Twin,  
with hopper and screw conveyor  
**WANGEN VarioTwin**

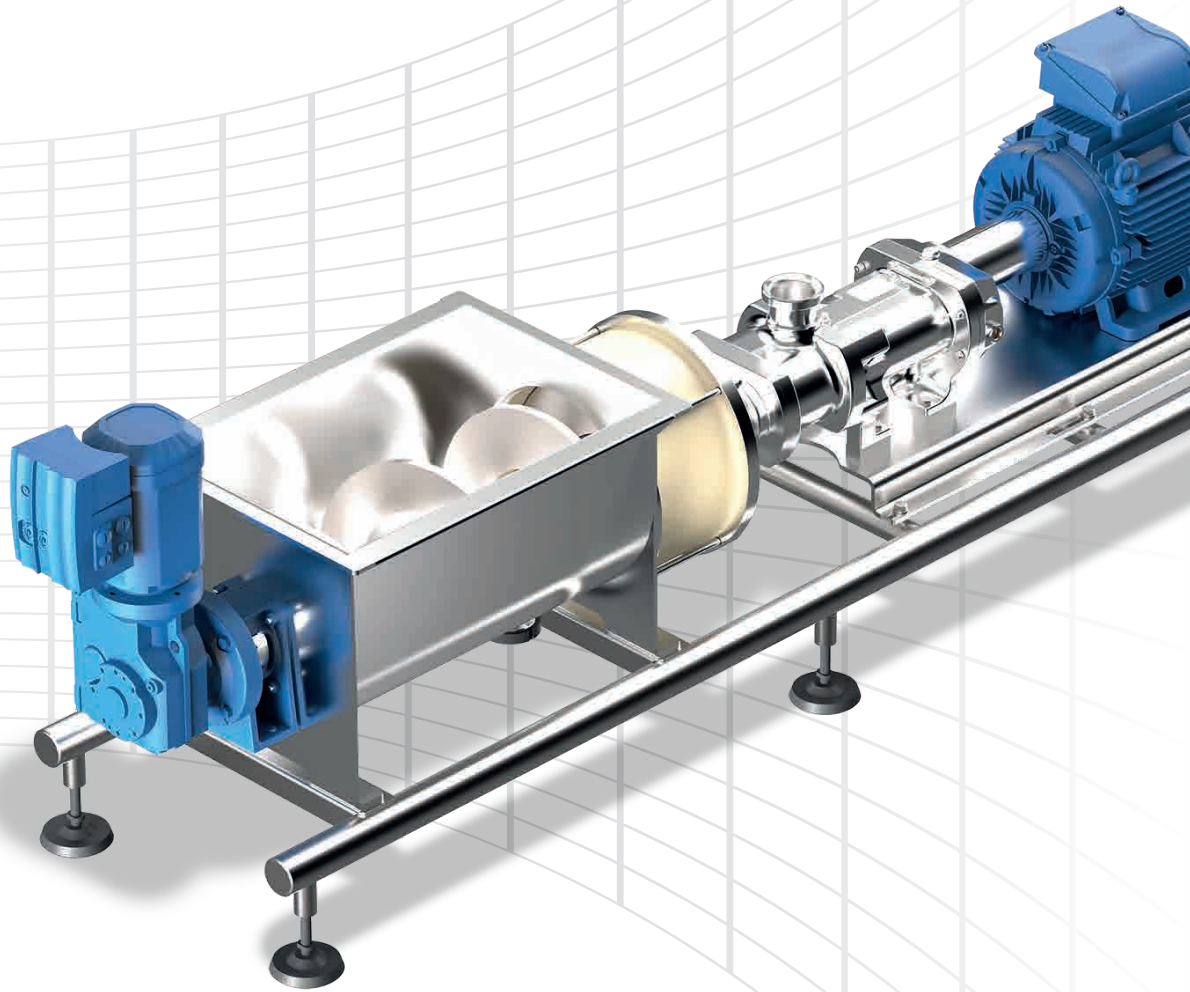


Gently feeding high-viscosity media:  
The sanitary add-on to the WANGEN  
Twin screw pump.

## Feed unit with hopper and screw conveyor

# WANGEN VarioTwin

The VarioTwin is the ideal feeder unit to pump highly viscous, not flowable media for the series 104 and 130 of the WANGEN Twin. This is due to the forced conveying of the pumped media via the feed screw. To cover the widest possible range of applications, the length of the hopper can optionally be designed at various levels. Therefore, the name VarioTwin was chosen.

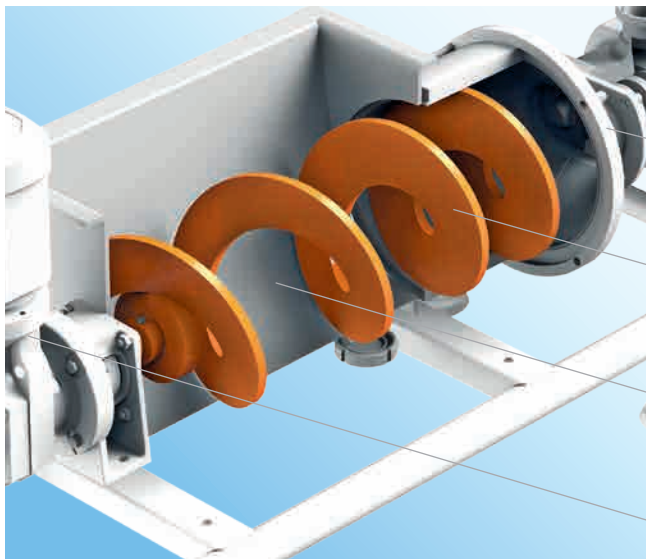

Cross-section of the 'VarioTwin' hopper.

S-cone adapter element. Connects the feed unit with the WANGEN Twin. Suitable sizes for the Twin 104 and 130.

'Coreless' screw conveyor. Is able to return excess material. Particularly gentle feed. Simple, effective cleaning.

Hopper available in variable length, optimally balanced to meet the field of application and requirements.

Drive of feed screw in the hopper can be regulated separately.

### Product advantages:

- 'Coreless screw' for gentle product treatment of media.
- Sanitary-optimized design; therefore, minimal dead spaces. Enables easy and efficient cleaning.
- Cantilevered support system of the screw for maximum hygiene with minimal residues.
- Low space requirement due to compact design.
- Drive independently controlled pump speed.
- Low energy consumption due to energy-efficient screw geometry.
- Materials are FDA-compliant, product-contacting parts in 1.4571/1.4404.

### Technical highlights:

- Flowrate up to 44.03 gpm
- Temperature up to +33.8 °F
- Viscosity up to 3,000,000 mPa·s



## Applications

# Conveying Materials

The WANGEN VarioTwin is suitable for pumping the following media:

- High-viscosity dough in the baking industry
- Fruit, such as strawberries, including frozen fruit
- Vegetables, such as potatoes
- High-viscosity chocolate mixture, marzipan and sugar mixtures (licorice, etc.)
- High-viscosity dairy products, such as curd
- Pulp-containing media, such as additives in food production
- High-viscosity soy products (okara)
- Meat-based products, such as raw mixture of reconstituted meat, minced meat, sausage meat or animal feed
- Fiber-containing extracts for the cosmetics industry (cream, ointment or soap)
- High-viscosity chemical products, such as anti-freezing agents, glues (including wood glue) or raw materials and pastes




## Benefits

# Characteristics

Due to the special design of the WANGEN VarioTwin's hopper, the proven, low dead-space concept of the Twin series is consistently broadened by further advantages

When using hopper feed pumps, the media feed may be subjected to severe fluctuations. To balance the fluctuations, the 'coreless' feeder used in WANGEN pumps ensures a large buffer volume during media supply. At the front section of the feeder, excess material is returned by the axial feeder cavity to the rear section and thus balances the feed volume in the case of temporarily low material supply. This ensures a constant even filling during the feed process.

Another advantage of this technology is being able to feed shear-sensitive materials.

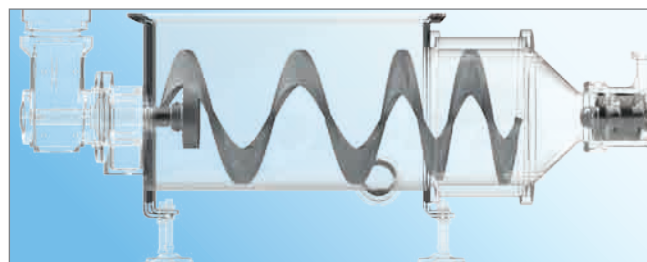

Section of the hopper, side view. Version with spherical feet



**Quality and Environmentally committed**

WANGEN PUMPEN is ISO 9001:2008 and ISO 14001:2004 certified.



Your contact:

**Wangen America, Inc.**  
855 N. Wood Dale Road,  
Suite A  
Wood Dale, IL 60191  
USA

**Pumpenfabrik Wangen GmbH**  
Simoniusstrasse 17  
88239 Wangen im Allg.  
Germany  
[www.wangen.com](http://www.wangen.com)